



GRU AUTO Page 1 of 3

Installation Instructions



Un-Pack GRU Auto Contents



Screw in 100mm Levelling Feet




Adjust Feet Until Tank Is Level



Ensure Fall From Tank To Main Drain



Choose & Clear Area To Fit The GRU Auto

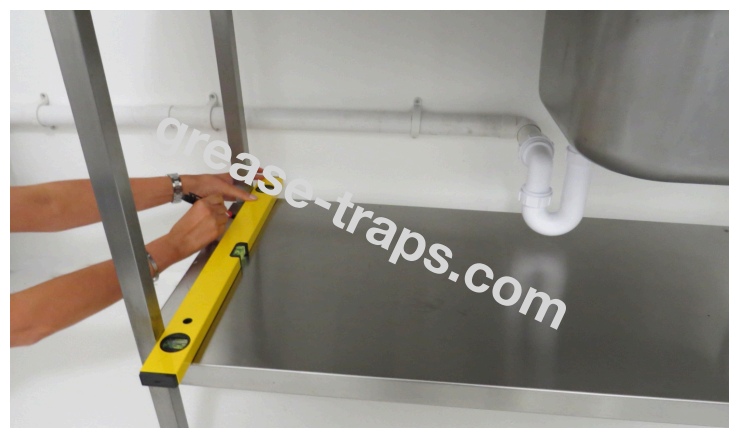

Place Straight Edge Inside Legs & Mark Out



Cut Out Shelf With Replicator, Leaving Edges



Apply Edges With Edging Seal Or File Smooth



Unscrew & Remove P Trap From Sink



Replace With Low Level Trap (McAlpine SM10)



Fit 2" Outlet Pipe From Main Drain



Position GRU Auto In Location



Plumb Pipe From Sinks, Ensuring Gravity Fall



Plumb Outlet, Ensuring Gravity Fall On Trap



Glue Pipe Work Using Solvent Weld Adhesive



Secure Pipework To Wall Using Brackets



Connect Compression Fittings To Tank



Fill Tank With Water & Switch On Heater

